

Figure 1

0052360 " 29T89960

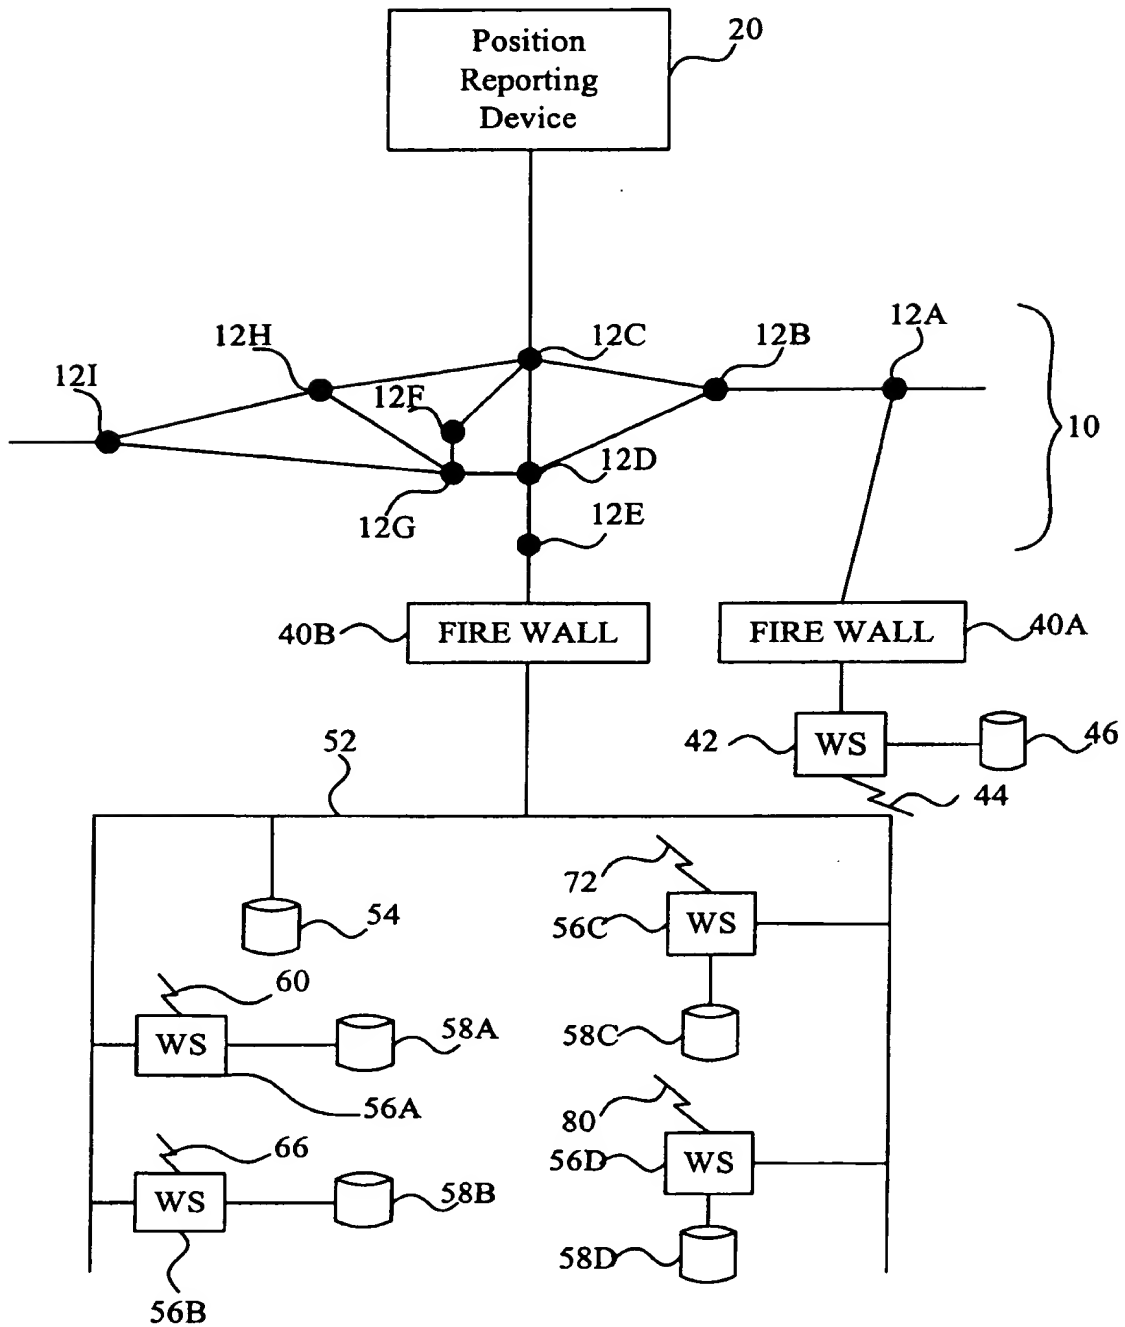


Figure 2

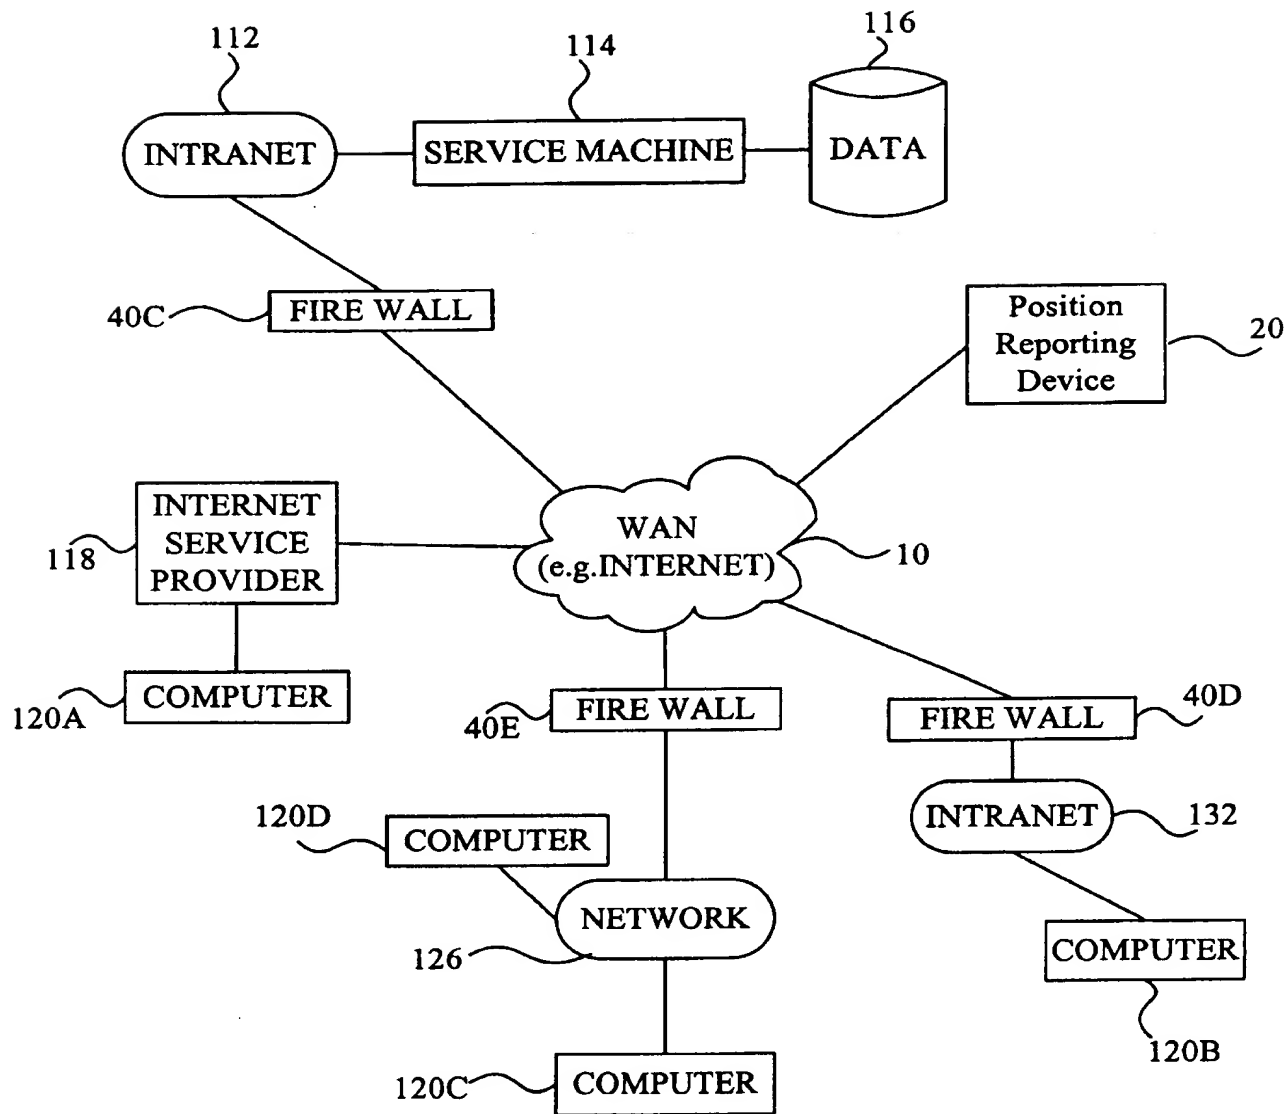


Figure 3

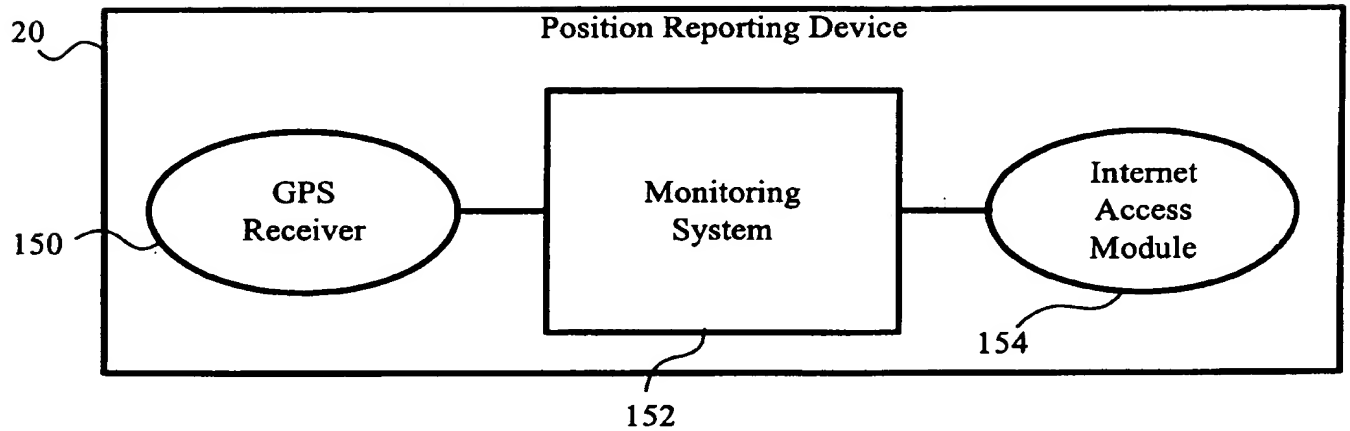


Figure 4

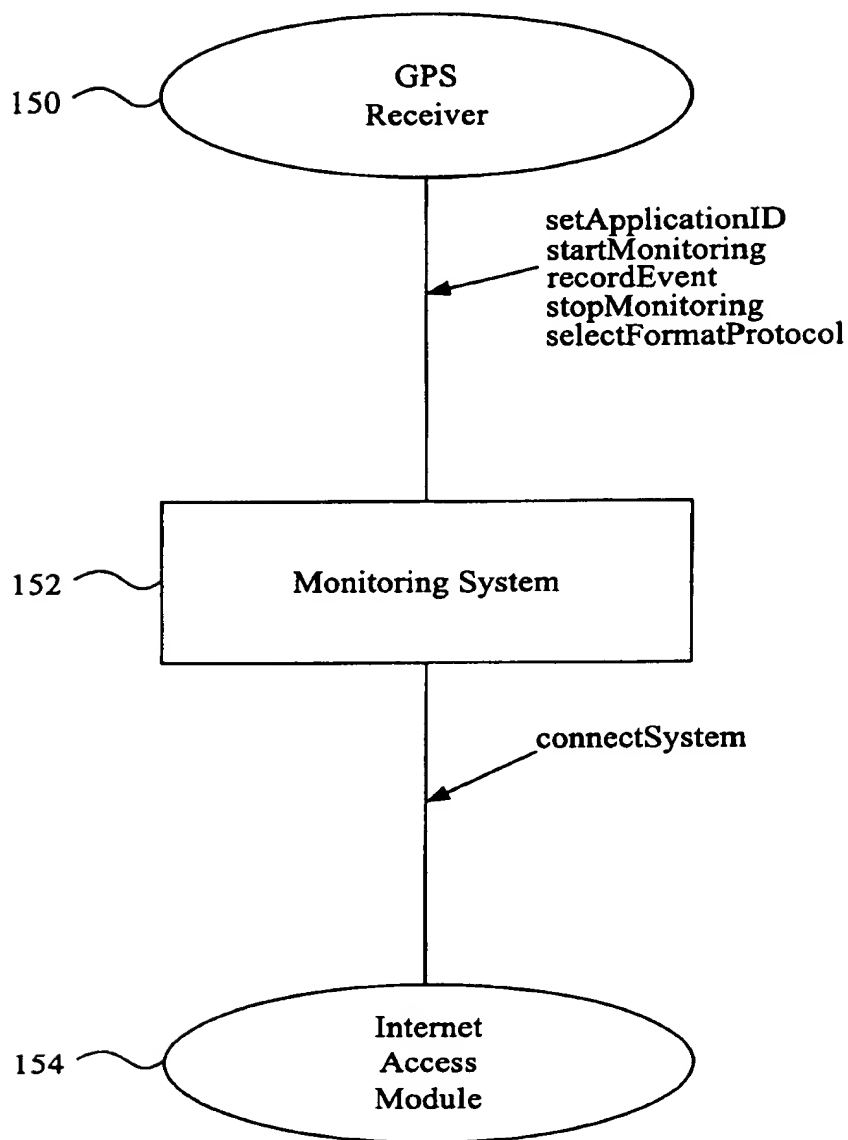


Figure 5



Return Value	Function Name	Description
bool	getNextSession	Returns false when there is no more session; true otherwise
string	getFileName	Returns file name for the EventData
map<string, string>	getSessionInformation	Returns the map. Keys are UserID, ApplicationID, CumulativeSessionNumber, StartTime, and Duration.
map<string, vector<string>>	getSessionEventData	Returns the map. Keys are EventName and EventTiming. The values of EventTiming vector are in the unit of 10th of a second converted from unsigned integer to string.

Figure 6B

Return Value	Function Name	Description
bool	getNextLine	Returns one line of string data as an out parameter string. The function returns true if there is a line; false if no more line exists with empty string.
string	getFileNameWithSuffix	Returns file name for the data with suffix if applicable

Figure 6C

005260" 29789960



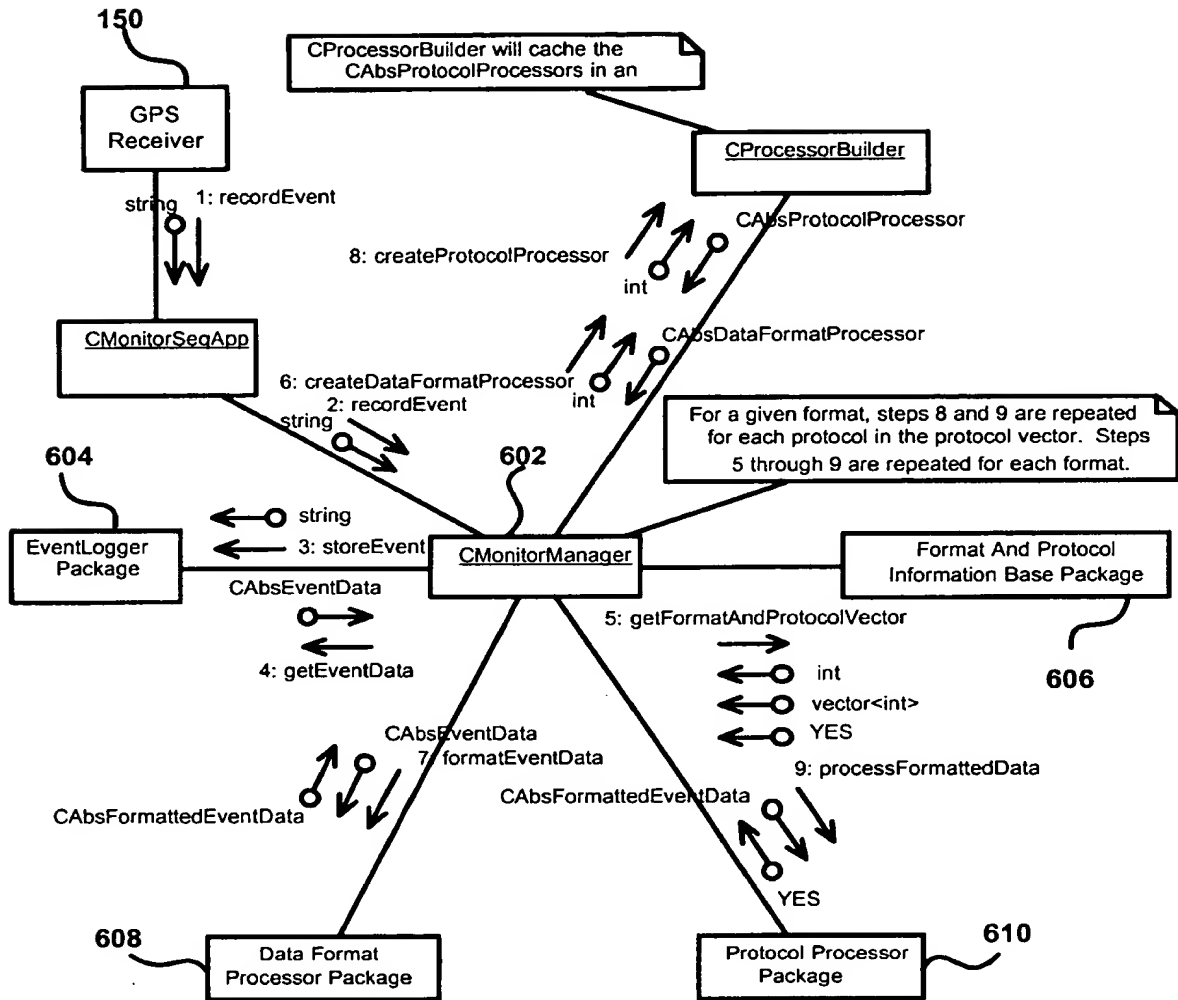


Figure 8

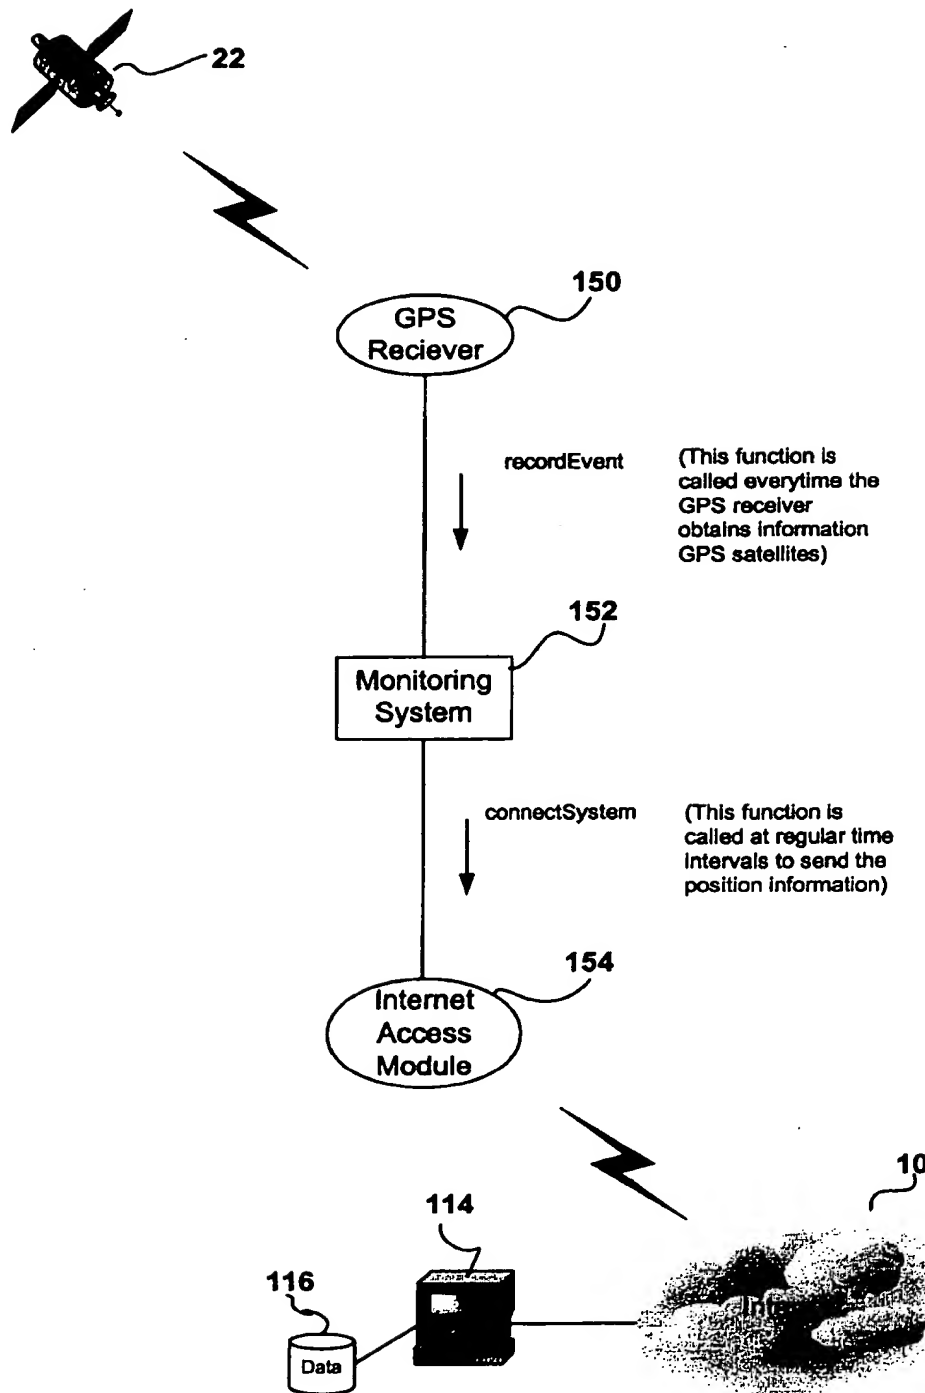


Figure 9

005260" 29T29950


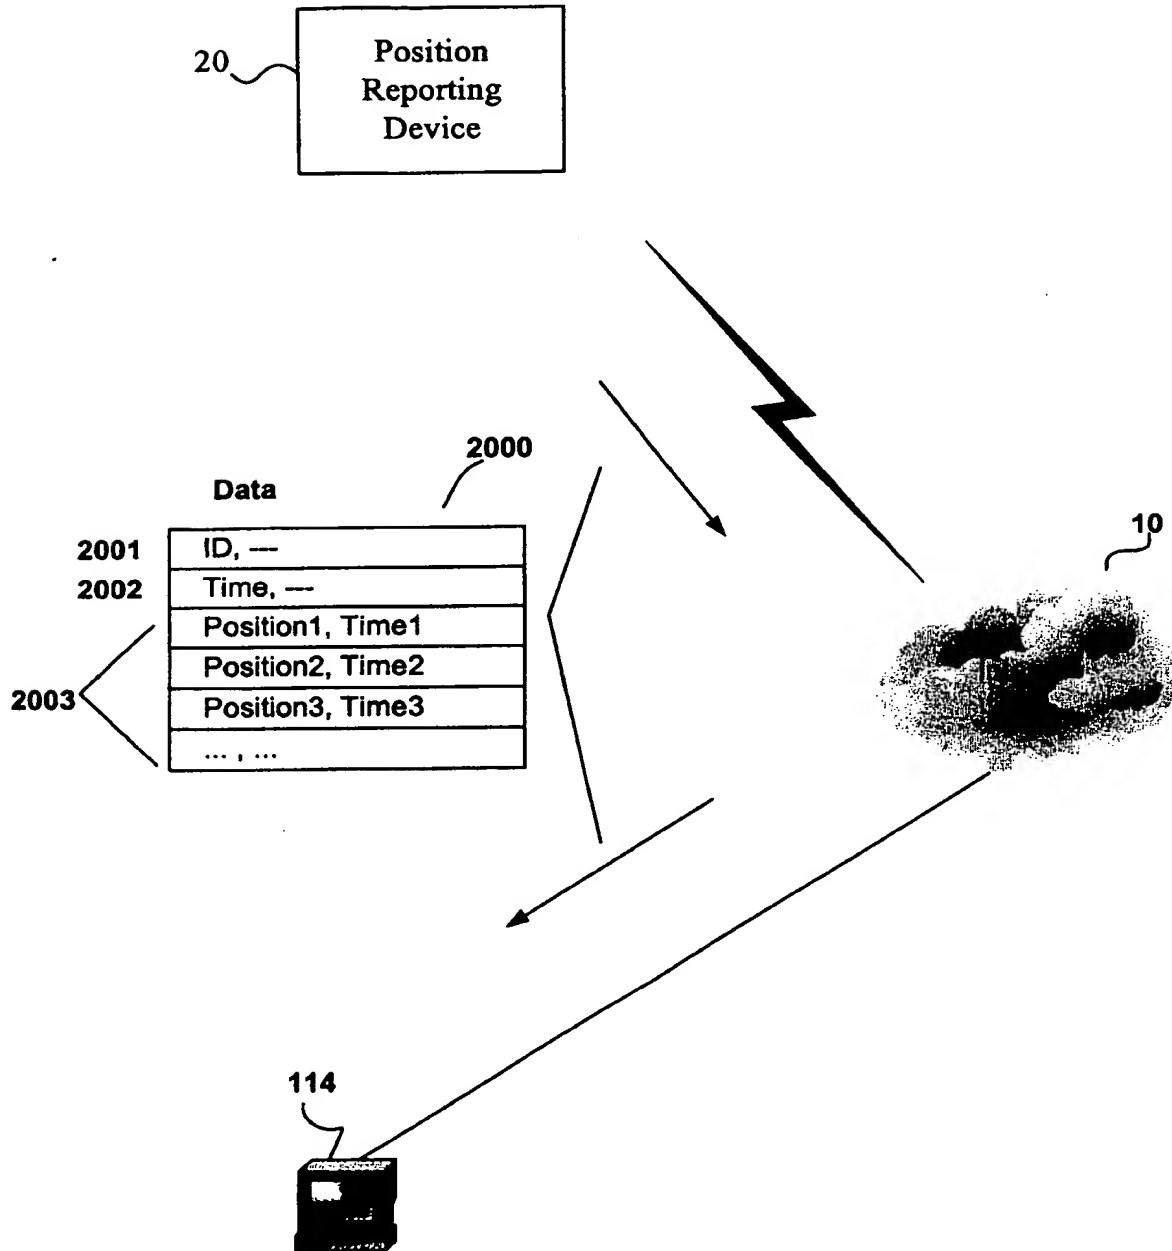


Figure 10

ID, ---
Time, ---
Position1, Time1
Position2, Time2
Position3, Time3
...

2000

114

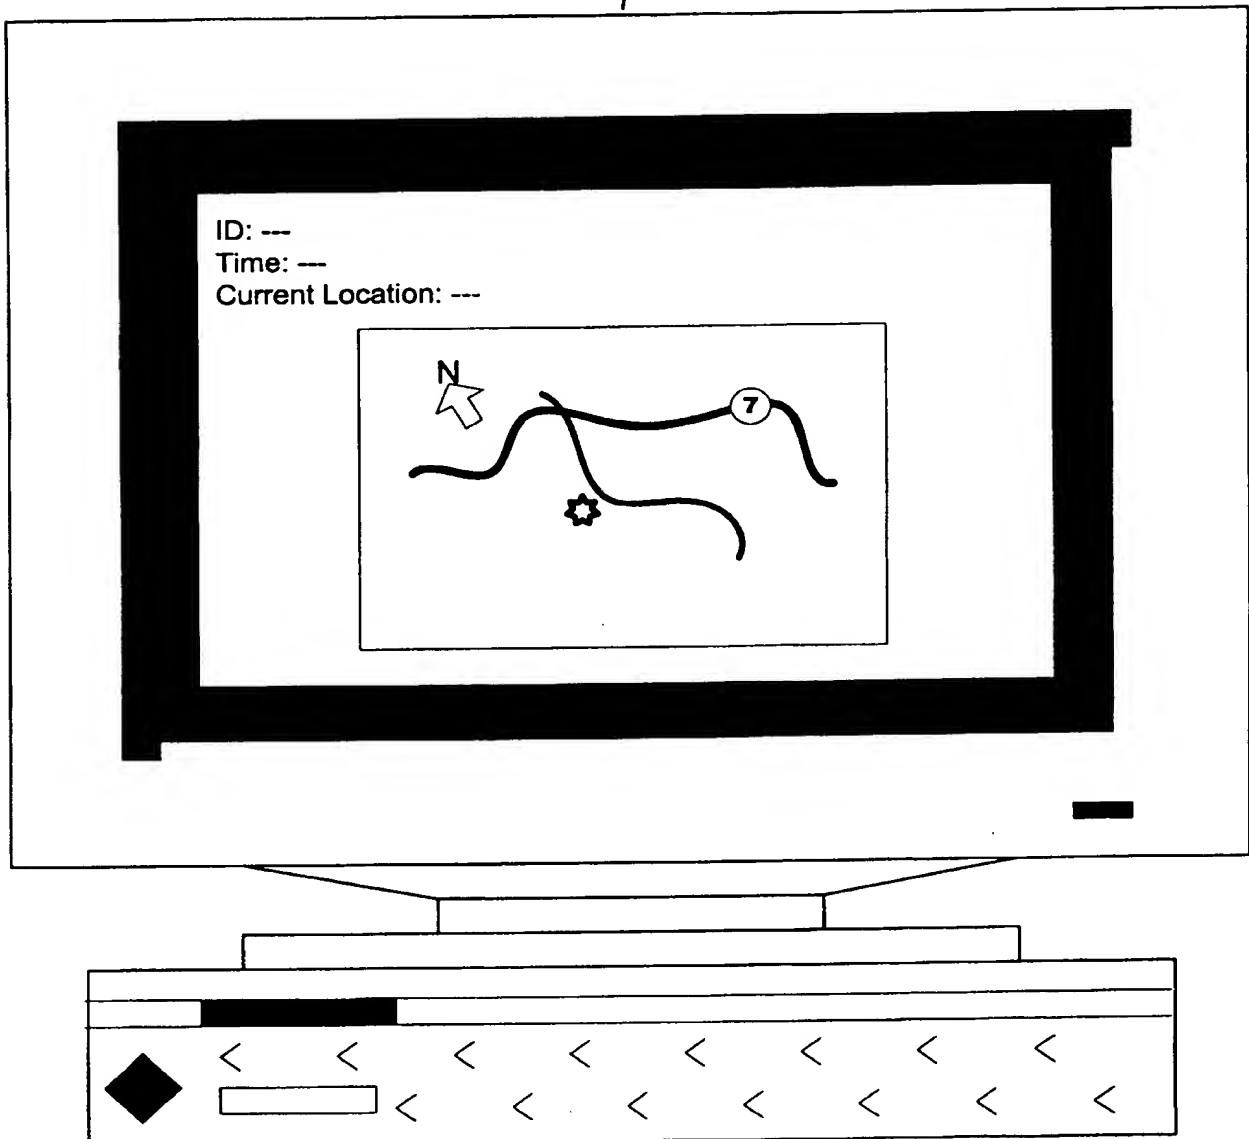

005250" 29T89960

Figure 11

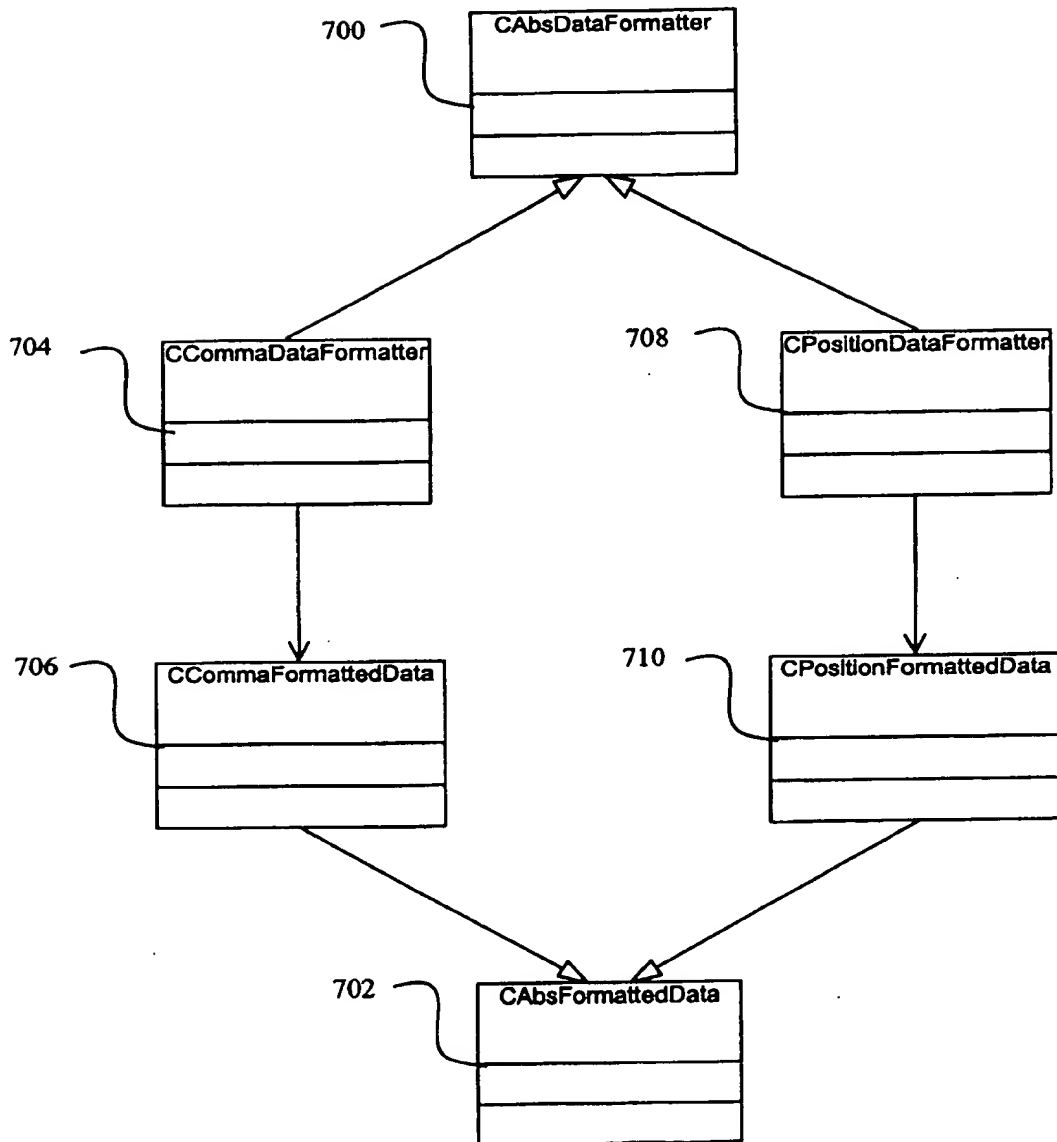


Figure 12

005260" 29F89960

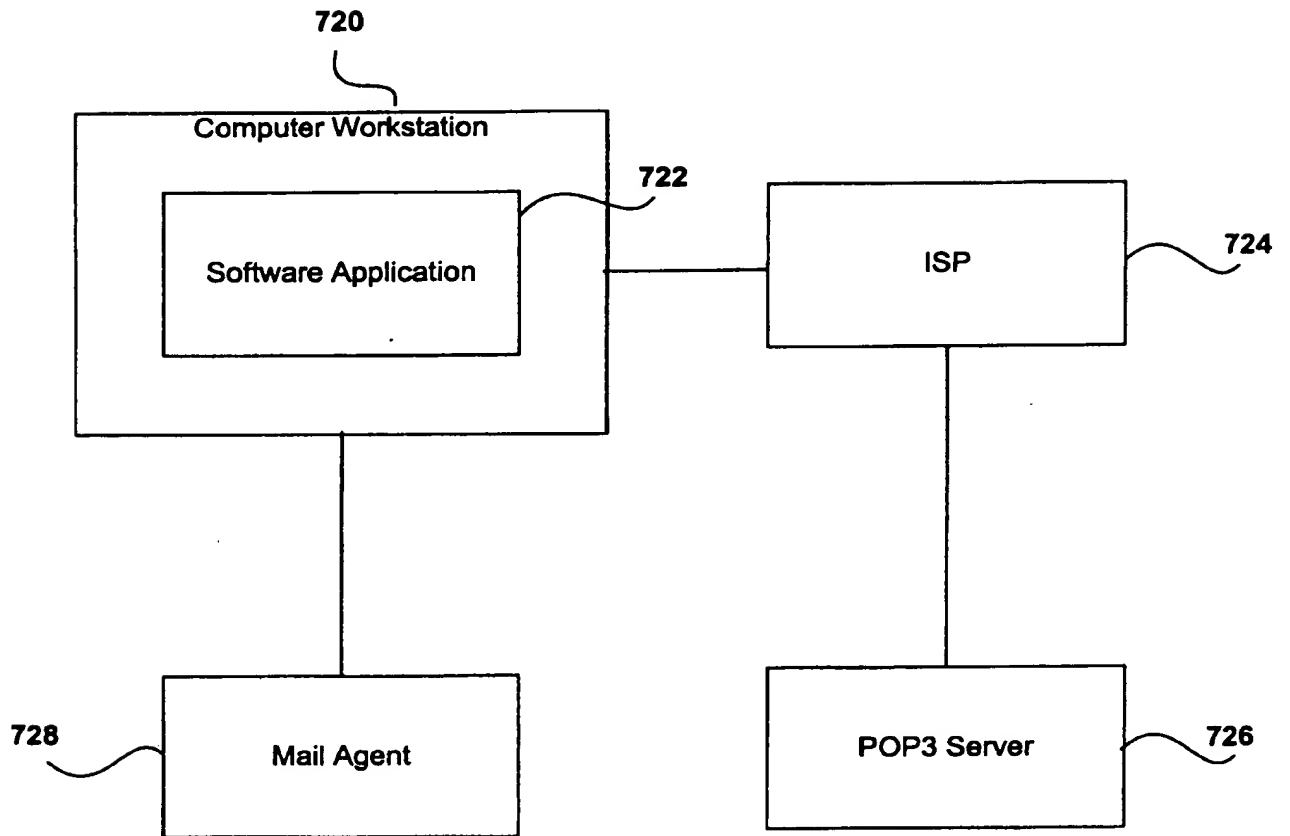


Figure 13

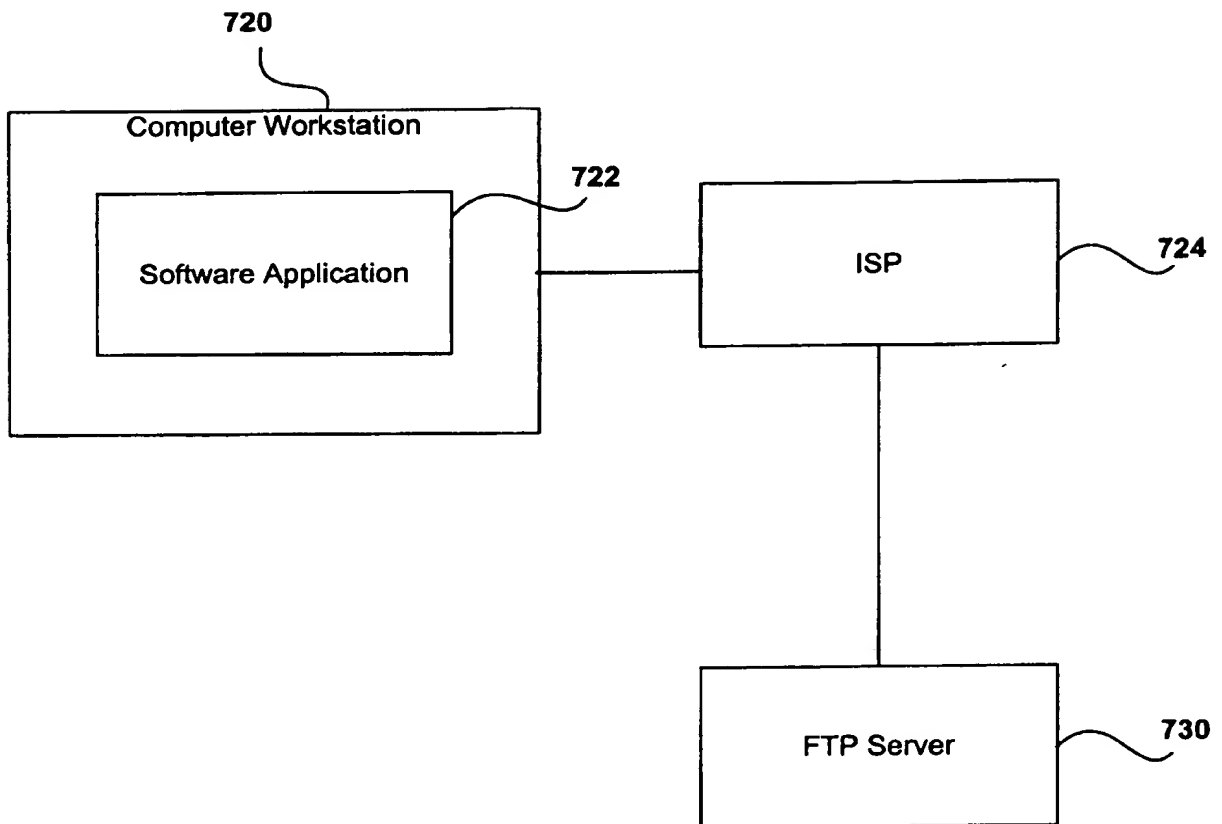


Figure 14

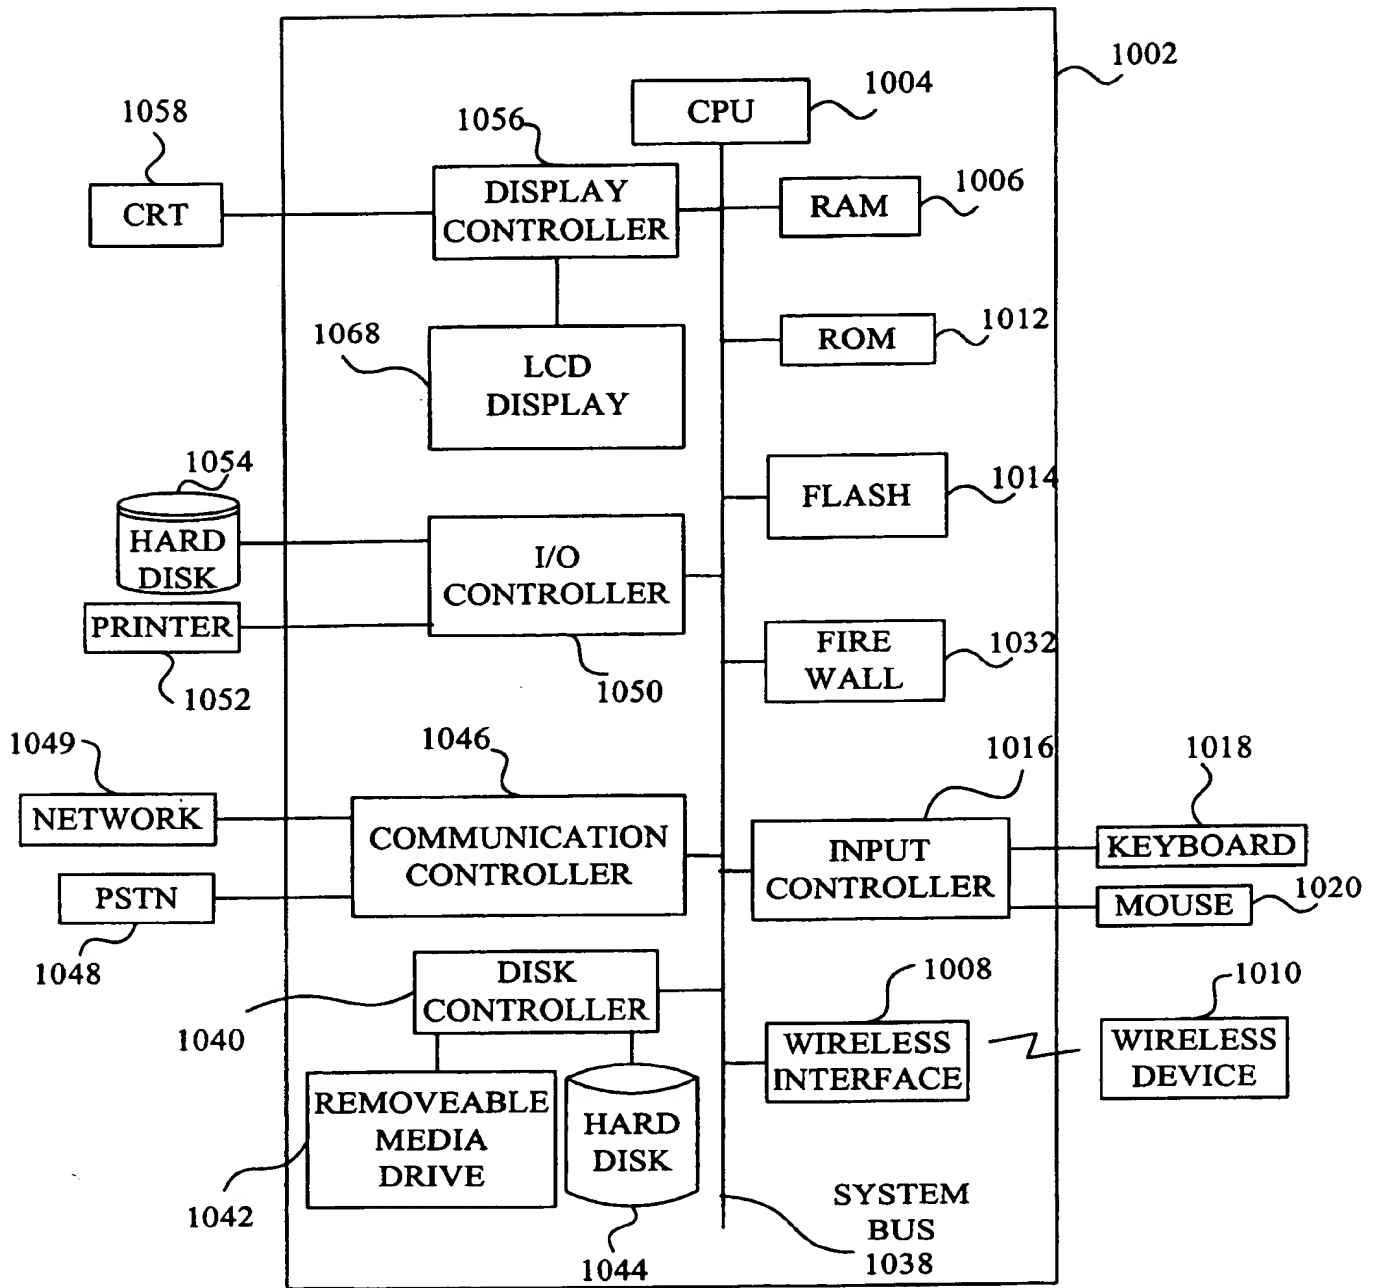


Figure 15